

T60 H

3




AWARDED AMONG THE 100 ITALIAN EXCELLENCE



T60 H

Technical Data Sheet

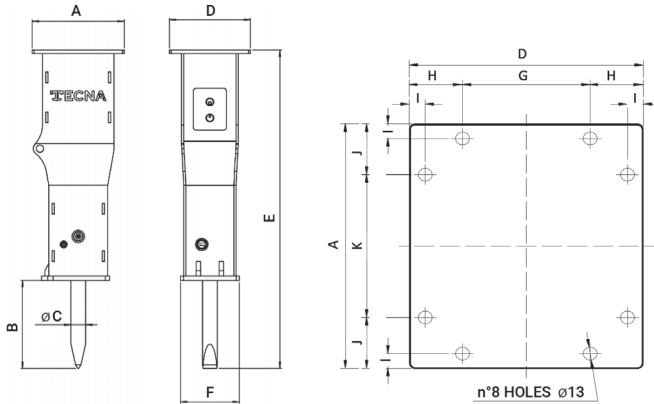

	MM	INCH
A	250	9,8
B	235	9,3
ϕ C	40	1,6
D	220	8,7
E	830	32,7
F	150	5,9
G	120	4,7
H	50	2,0
I	15	0,6
J	52	2,0
K	146	5,7
-	-	-

ITALIANO	ENGLISH	DEUTSCH	METRIC UNIT		IMPERIAL UNIT	
PESO ESCAVATORE	SUITABLE EXCAVATOR	GEEIGNET FÜR TRÄGERGERÄT	0,6÷1,6	Ton	1323÷3527	lbs
PESO MEDIO OPERATIVO	OPERATING WEIGHT	ARBEITSGEWICHT DES HAMMERS	75	Kg	165,3	lbs
DIAMETRO UTENSILE	TOOL DIAMETER	MEISSEL DURCHMESSER	40	mm	1,57	in
PORTATA	OIL SUPPLY	ÖLBEDARF	12÷25	l/min	3 ÷ 7	GPM
PRESSIONE DI LAVORO	BREAKER WORKING PRESSURE	ARBEITSSOLDRUCK IM HYDRAULIKHAMMER	100÷140	bar	1450÷2031	PSI
PRESSIONE REGOLATA ALL'ESCAVATORE	RELIEF PRESSURE SETTING	ARBEITSSOLDRUCK IM TRÄGERGERÄT	180	bar	2611	PSI
CONTROPRESSIONE MAX	MAX BACK PRESSURE	MAX STAUDRUCK	20	bar	290	PSI
POTENZA INGRESSO (MAX)	INPUT POWER (MAX)	EINGANGS LEISTUNG (MAX)	5	Kw	6,7	HP
CLASSE DI ENERGIA D'URTO	IMPACT ENERGY CLASS	KLASSE SCHLAGENERGIE	245	J	181	Ft/lbs
NUMERO DI COLPI AL MINUTO	IMPACT RATE	SCHLAGZAHL PRO MINUTE	800÷1100	BPM	800÷1100	BPM
TEMPERATURA MAX OLIO IDRAULICO	MAX TEMPERATURE HYDRAULIC OIL	MAX ÖLTEMPERATUR	80	°C	176	°F
TUBAZIONE IMPIANTO MANDATA (Ø min.)	RECOMMENDED INLET LINE SIZE (Ø min.)	EMPFOHLENE VORLAUF LEITUNG (Ø min.)	10	mm	0,39	in
TUBAZIONE IMPIANTO RITORNO (Ø min.)	RECOMMENDED RETURN LINE SIZE (Ø min.)	EMPFOHLENE RUECKL. LEITUNG (Ø min.)	12	mm	0,47	in
LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI	SUGGESTED MIN FLEX HOSES LENGTH	LÄNGE HAMMER ANSCHLUSS SCHLAUCH	1000	mm	39,4	in
ATTACCO INGRESSO DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S RETURN LINE	HAMMER SCHLAUCH RÜCKKLAUF	1/2" G		1/2" G	
ATTACCO USCITA DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S INLET LINE	HAMMER SCHLAUCH VORLAUF	1/2" G		1/2" G	