

# TB120 H

7




AWARDED AMONG THE 100 ITALIAN EXCELLENCE



# TB120 H

## Technical Data Sheet

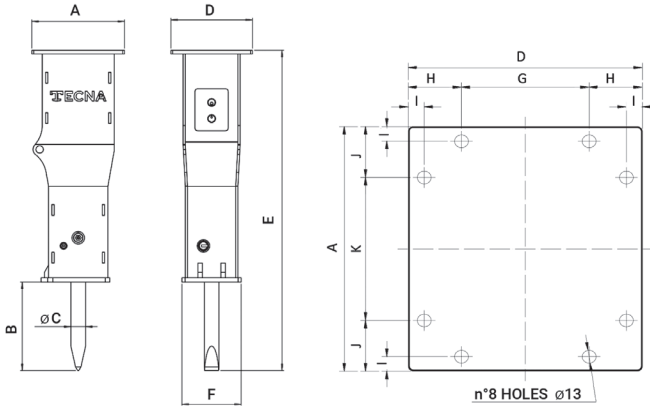

	MM	INCH
A	250	9,8
B	269	10,6
φ C	45	1,8
D	220	8,7
E	953	37,5
F	160	6,3
G	120	4,7
H	50	2,0
I	15	0,6
J	52	2,0
K	146	5,7
-	-	-

ITALIANO	ENGLISH	DEUTSCH	METRIC UNIT		IMPERIAL UNIT	
PESO ESCAVATORE	SUITABLE EXCAVATOR	GEEIGNET FÜR TRÄGERGERÄT	0,8÷2,5	Ton	1764÷5512	lbs
PESO MEDIO OPERATIVO	OPERATING WEIGHT	ARBEITSGEWICHT DES HAMMERS	120	Kg	264,6	lbs
DIAMETRO UTENSILE	TOOL DIAMETER	MEISSEL DURCHMESSER	45	mm	1,77	in
PORTATA	OIL SUPPLY	ÖLBEDARF	20÷35	l/min	5÷9	GPM
PRESSIONE DI LAVORO	BREAKER WORKING PRESSURE	ARBEITSSOLDRUCK IM HYDRAULIKHAMMER	100÷130	bar	1450÷1885	PSI
PRESSIONE REGOLATA ALL'ESCAVATORE	RELIEF PRESSURE SETTING	ARBEITSSOLDRUCK IM TRÄGERGERÄT	180	bar	2611	PSI
CONTROPRESSIONE MAX	MAX BACK PRESSURE	MAX STAUDRUCK	25	bar	363	PSI
POTENZA INGRESSO (MAX)	INPUT POWER (MAX)	EINGANGS LEISTUNG (MAX)	6	Kw	8,2	HP
CLASSE DI ENERGIA D'URTO	IMPACT ENERGY CLASS	KLASSE SCHLAGENERGIE	299	J	221	Ft/lbs
NUMERO DI COLPI AL MINUTO	IMPACT RATE	SCHLAGZAHL PRO MINUTE	570÷860	BPM	570÷860	BPM
TEMPERATURA MAX OLIO IDRAULICO	MAX TEMPERATURE HYDRAULIC OIL	MAX ÖLTEMPERATUR	80	°C	176	°F
TUBAZIONE IMPIANTO MANDATA (Ø min.)	RECOMMENDED INLET LINE SIZE (Ø min.)	EMPFOHLENE VORLAUF LEITUNG (Ø min.)	10	mm	0,39	in
TUBAZIONE IMPIANTO RITORNO (Ø min.)	RECOMMENDED RETURN LINE SIZE (Ø min.)	EMPFOHLENE RUECKL. LEITUNG (Ø min.)	14	mm	0,55	in
LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI	SUGGESTED MIN FLEX HOSES LENGTH	LÄNGE HAMMER ANSCHLUSS SCHLAUCH	1400	mm	55,1	in
ATTACCO INGRESSO DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S RETURN LINE	HAMMER SCHLAUCH RÜCKLAUF	1/2" G		1/2" G	
ATTACCO USCITA DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S INLET LINE	HAMMER SCHLAUCH VORLAUF	1/2" G		1/2" G	