

TB200 H




AWARDED AMONG THE 100 ITALIAN EXCELLENCE



TB200 H

12

Technical Data Sheet

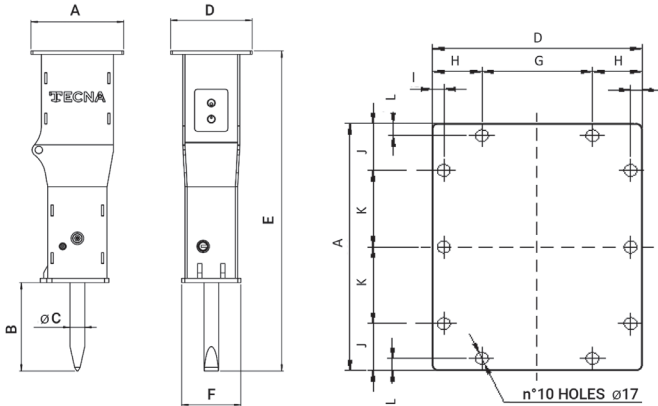

	MM	INCH
A	355	14,0
B	293	11,5
φ C	56	2,2
D	275	10,8
E	1117	44,0
F	190	7,5
G	145	5,7
H	65	2,6
I	15	0,6
J	67,5	2,7
K	110	4,3
L	17,5	0,7

ITALIANO	ENGLISH	DEUTSCH	METRIC UNIT		IMPERIAL UNIT	
PESO ESCAVATORE	SUITABLE EXCAVATOR	GEEIGNET FÜR TRÄGERGERÄT	3,5÷4,5	Ton	7716÷9921	lbs
PESO MEDIO OPERATIVO	OPERATING WEIGHT	ARBEITSGEWICHT DES HAMMERS	200	Kg	440,9	lbs
DIAMETRO UTENSILE	TOOL DIAMETER	MEISSEL DURCHMESSER	56	mm	2,20	in
PORTATA	OIL SUPPLY	ÖLBEDARF	35÷55	l/min	9÷15	GPM
PRESSIONE DI LAVORO	BREAKER WORKING PRESSURE	ARBEITSSOLDRUCK IM HYDRAULIKHAMMER	100÷150	bar	1450÷2176	PSI
PRESSIONE REGOLATA ALL'ESCAVATORE	RELIEF PRESSURE SETTING	ARBEITSSOLDRUCK IM TRÄGERGERÄT	180	bar	2611	PSI
CONTROPRESSIONE MAX	MAX BACK PRESSURE	MAX STAUDRUCK	25	bar	363	PSI
POTENZA INGRESSO (MAX)	INPUT POWER (MAX)	EINGANGS LEISTUNG (MAX)	14	Kw	18,4	HP
CLASSE DI ENERGIA D'URTO	IMPACT ENERGY CLASS	KLASSE SCHLAGENERGIE	550	J	406	Ft/lbs
NUMERO DI COLPI AL MINUTO	IMPACT RATE	SCHLAGZAHL PRO MINUTE	600÷900	BPM	600÷900	BPM
TEMPERATURA MAX OLIO IDRAULICO	MAX TEMPERATURE HYDRAULIC OIL	MAX ÖLTEMPERATUR	80	°C	176	°F
TUBAZIONE IMPIANTO MANDATA (Ø min.)	RECOMMENDED INLET LINE SIZE (Ø min.)	EMPFOHLENE VORLAUF LEITUNG (Ø min.)	12	mm	0,47	in
TUBAZIONE IMPIANTO RITORNO (Ø min.)	RECOMMENDED RETURN LINE SIZE (Ø min.)	EMPFOHLENE RUECKL. LEITUNG (Ø min.)	14	mm	0,55	in
LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI	SUGGESTED MIN FLEX HOSES LENGTH	LÄNGE HAMMER ANSCHLUSS SCHLAUCH	1600	mm	63,0	in
ATTACCO INGRESSO DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S RETURN LINE	HAMMER SCHLAUCH RÜCKKLAUF	1/2" G		1/2" G	
ATTACCO USCITA DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S INLET LINE	HAMMER SCHLAUCH VORLAUF	1/2" G		1/2" G	